


JOB NAME: _____

DATE: _____

TYPE: _____

DIMENSIONS:

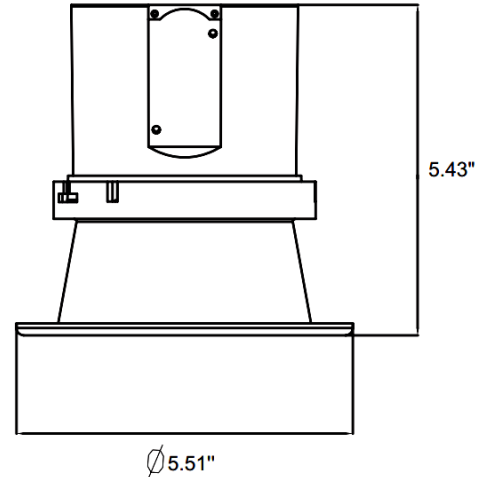

- CRLC4-15W-30K-D** **CRLC4-15W-30K-D-WH**
- CRLC4-15W-40K-D** **CRLC4-15W-40K-D-WH**
- CRLC4-15W-50K-D** **CRLC4-15W-50K-D-WH**

4" LED COMMERCIAL RECESSED LIGHT

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 80~85LM/W

HOUSING SPECIFICATIONS:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP | FINISH |
|--------------------|-------|------------|--------|------------|--------|
| CRLC4-15W-30K-D | 15W | 120~277VAC | 1200LM | 3000K | HAZE |
| CRLC4-15W-40K-D | 15W | 120~277VAC | 1245LM | 4000K | HAZE |
| CRLC4-15W-50K-D | 15W | 120~277VAC | 1275LM | 5000K | HAZE |
| CRLC4-15W-30K-D-WH | 15W | 120~277VAC | 1200LM | 3000K | WHITE |
| CRLC4-15W-40K-D-WH | 15W | 120~277VAC | 1245LM | 4000K | WHITE |
| CRLC4-15W-50K-D-WH | 15W | 120~277VAC | 1275LM | 5000K | WHITE |

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DDTV(LUTRON),IP710(LEVITON)
- Total lumens: 1200~1275LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 5 years



JOB NAME: _____


DATE: _____

TYPE: _____

CRLC4-15W-30K-D CRLC4-15W-30K-D-WH
CRLC4-15W-40K-D CRLC4-15W-40K-D-WH
CRLC4-15W-50K-D CRLC4-15W-50K-D-WH

4" LED COMMERCIAL RECESSED LIGHT

PHOTOMETRY CHART:

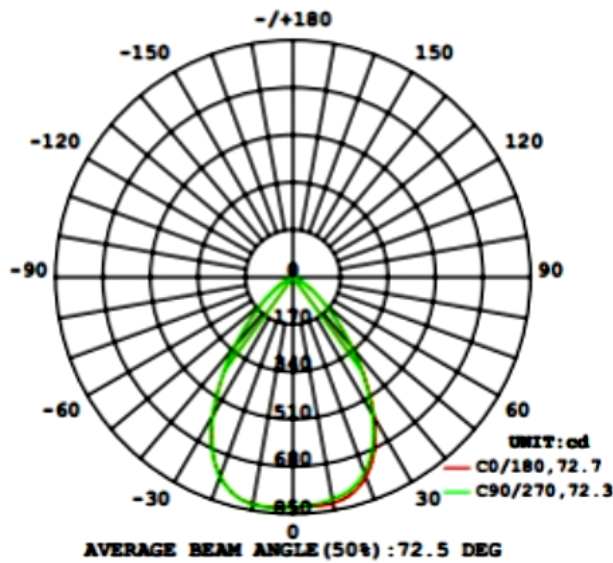

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP | FINISH |
|--------------------|-------|------------|--------|------------|--------|
| CRLC4-15W-30K-D | 15W | 120~277VAC | 1200LM | 3000K | HAZE |
| CRLC4-15W-40K-D | 15W | 120~277VAC | 1245LM | 4000K | HAZE |
| CRLC4-15W-50K-D | 15W | 120~277VAC | 1275LM | 5000K | HAZE |
| CRLC4-15W-30K-D-WH | 15W | 120~277VAC | 1200LM | 3000K | WHITE |
| CRLC4-15W-40K-D-WH | 15W | 120~277VAC | 1245LM | 4000K | WHITE |
| CRLC4-15W-50K-D-WH | 15W | 120~277VAC | 1275LM | 5000K | WHITE |

TWO WAYS TO ORDER :



| 1.ORDER COMPLETE | 2.ORDER ENGINE & TRIM SEPARATELY | | |
|--------------------|----------------------------------|--------|---------------|
| | UNIT | ENGINE | TRIM |
| CRLC4-15W-30K-D | CRLC-ENG-15W-30K-D | + | CRLC-TRM-4 |
| CRLC4-15W-40K-D | CRLC-ENG-15W-40K-D | + | CRLC-TRM-4 |
| CRLC4-15W-50K-D | CRLC-ENG-15W-50K-D | + | CRLC-TRM-4 |
| CRLC4-15W-30K-D-WH | CRLC-ENG-15W-30K-D | + | CRLC-TRM-4-WH |
| CRLC4-15W-40K-D-WH | CRLC-ENG-15W-40K-D | + | CRLC-TRM-4-WH |
| CRLC4-15W-50K-D-WH | CRLC-ENG-15W-50K-D | + | CRLC-TRM-4-WH |

