

# LFE SERIES Outdoor Lighting

LFE-50W-MCT-KN  
COMPACT FLOOD LIGHT

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




**MCT**

Selection:



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

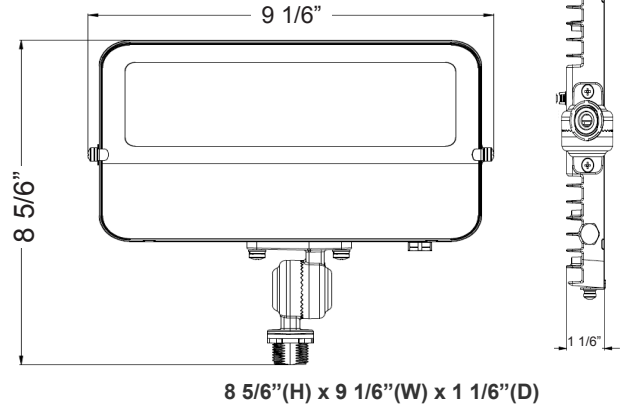

Ideal for general site lighting, alleys, loading docks, doorways, pathway, parking areas. Replace existing HID flood lights/wall packs. Great for use with motion sensors or other instant on/off controls. Solid state lighting technology for long life, low maintenance and high efficiency .

## Features

- 90° Adjustable 1/2" Knuckle Mount
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- 7-Year Warranty
- 70,000 hours rated life
- Low Maintenance and High Efficiency

## Technical Specification

### Electrical:

- Voltage: 120 VAC 50/60Hz
- Wattage: 50W
- Power Factor: >0.9
- Efficacy: 119 LPW
- THD: <25%

### Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish (Dark Bronze Finish)
- Solid State Lighting Technology For Long Life, Low Maintenance Needed and High Efficiency
- High Conductive Aluminum LED Board
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Cord type: 18" SJTW 18/3 AWG cable
- MCT: Multi Color Temperature (Switch On The Back of Fixture With Silicon Cover)
- Total lumens: 6081LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: CRI > 70
- Beam Angle: 120° x 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall pack
- Great for use with motion sensors or other instant on/off controls

### Other Models:



- 15W | 1600LM | LFE-15W-MCT-KN
- 30W | 3150LM | LFE-30W-MCT-KN




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co



## Photometrics: LFE-50W-MCT-KN



BUD Rating: B2-U2-G1

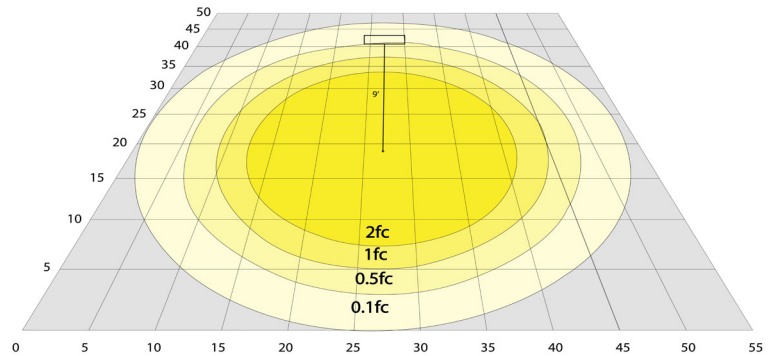

Area 50'x 55' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LFE-50W-MCT-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFE-50W-MCT-KN	50W	120V	6081LM	3000K 4000K 5000K	B2-U2-G1	119

## Sample Ordering

Model Wattage Color Temp.

LFE - 50W - MCT - KN

## Accessories Options


Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

## ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ  
Weatherproof cover with  
Three  
(3) 1/2" hubs



B-41



Mounts to landscape  
post  
or any 1/2" hub



Fully adjustable 1/2"  
threaded knuckle for aiming  
versatility

## Example:

1. LFE-50W-MCT-KN  
WRC-3-BRZ

(For LFE 50W MCT fixture 120V)  
(For Weatherproof cover with three(3) 1/2" hubs)

