


# LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN-BK

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

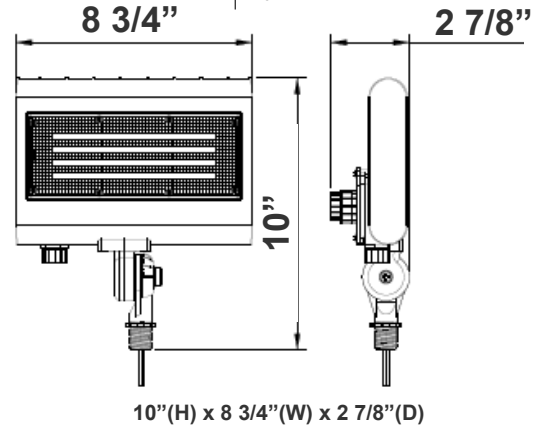

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

## Features

- DLC Premium & LED High-Lumen Floor lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 7-Year Warranty
- 70,000 Hours Rated Life
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

## Technical Specifications

### Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/ 15W/ 20W/ 30W
- Power Factor: >0.9
- Efficacy: 130 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Silver Finish)
- LED: Philips Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

### Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/ 4000K/ 5000K/ 5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120° X 90°

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs

### Other Models:



• 30W | 3900LM | LFX-SM-10-30W-MCTP-KN-WH • 30W | 3900LM | LFX-SM-10-30W-MCTP-KN • 30W | 3900LM | LFX-SM-10-30W-MCTP-SV




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com | www.westgatecontrols.co



**Photometrics:** LFX-SM-10-30W-MCTP-KN-BK

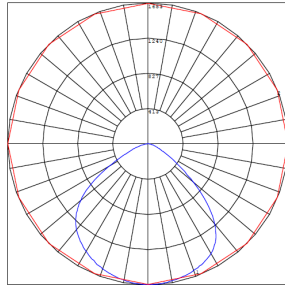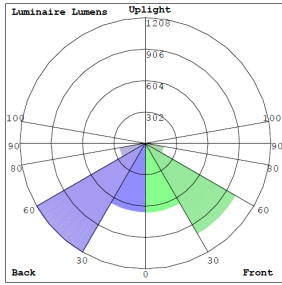

BUG Rating: B2-U0-G1

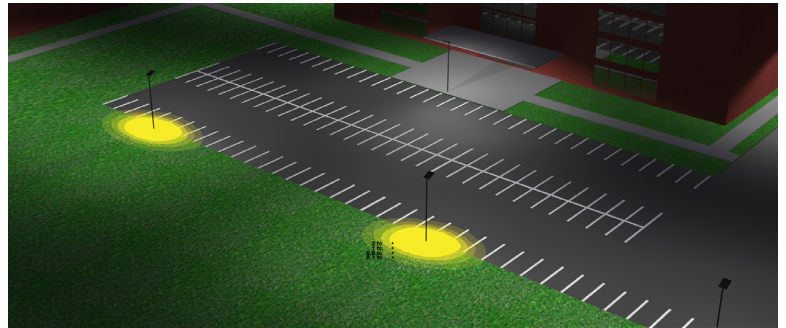

Area 40'x 50' Mounting Height: 20'


**Other Views:**



Side View



Front View

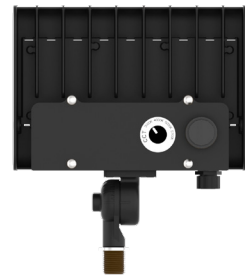

Back View

**Performance Table:** LFX-SM-10-30W-MCTP-KN-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-SM-10-30W-MCTP-KN-BK	10W	120~277V	1210LM	3000K 4000K 5000K 5700K	B2-U0-G1	130
			1250LM			
			1280LM			
	1280LM					
	1800LM					
	1880LM					
	1930LM					
	1930LM					
	2340LM					
	2400LM					
	2500LM					
	2500LM					
	3830LM					
	3880LM					
	3880LM					
3900LM						



# Sample Ordering

**Model**   **Size**   **Min.Wattage**   **Max.Wattage**   **Color Temp.**   **Mount**   **Housing**  
 LFX - SM - 10 - 30W - MCTP - KN - BK

## Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ =Weatherproof cover with three(3) 1/2" hubs

## ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ  
Weatherproof cover with  
Three  
(3) 1/2" hubs  
(Can be painted)



B-41  
(Can be painted)



Mounts to landscape  
post  
or any 1/2" hub



Fully adjustable 1/2"  
threaded knuckle for aiming  
versatility

## Color Options: Custom Color Available

Black   Silver   White   **Dark Bronze**   Green   Red   Yellow  
Default color



## Example:

1. LFX-SM-10-30W-MCTP-KN-BK

(For LFX 10-30W MCTP fixture 120V-277V)

2. LFX-SM-10-30W-MCTP-KN-BK  
WRC-3-BRZ

(For LFX 10-30W MCTP fixture 120V-277V)  
(Weatherproof cover with three(3) 1/2" hubs)

